


NOTES:

- 1.0 ALTIMETERS:
 - 1.1 ALT1 IS A TRANSOLVE P5 DUAL DEPLOYMENT ALTIMETER.
 - 1.1.1 MAIN POWER IS SUPPLIED BY ON-BOARD RECHARGABLE BATTERY.
 - 1.2 ALT2 IS AN OLSEN FCP-M1 DUAL DEPLOYMENT ALTIMETER.
 - 1.2.1 POWER IS SUPPLIED BY 9-VOLT BATTERY PLUGGED INTO ON-BOARD CONNECTOR.
- 2.0 SWITCHES ARE HEAVY DUTY 3 POLE DUAL THROW SLIDE TYPE. ACTUATORS ARE TRIMMED TO BE EVEN WITH BODY TUBE.
 - 2.1 ALL SWITCHES ARE MOUNTED WITH "ON" SIDE TOWARD BOTTOM OF ROCKET.
- 3.0 R1 - R4 ARE FOR PROTECTION OF ALTIMETER OUTPUT TRANSISTORS.
- 4.0 J1 IS A 26 POSITION DUAL ROW KEYED SOCKET.
- 5.0 J1 IS A 26 POSITION DUAL ROW KEYED LOCKING HEADER.
- 6.0 BP'S ARE SCREW-DOWN TYPE BINDING POSTS, MOUNTED TO END PLATES OF ALTIMETER BAY SUPPORT FRAME.
- 7.0 ALL WIRE IS 22 AWG STRANDED HOOK-UP TYPE.

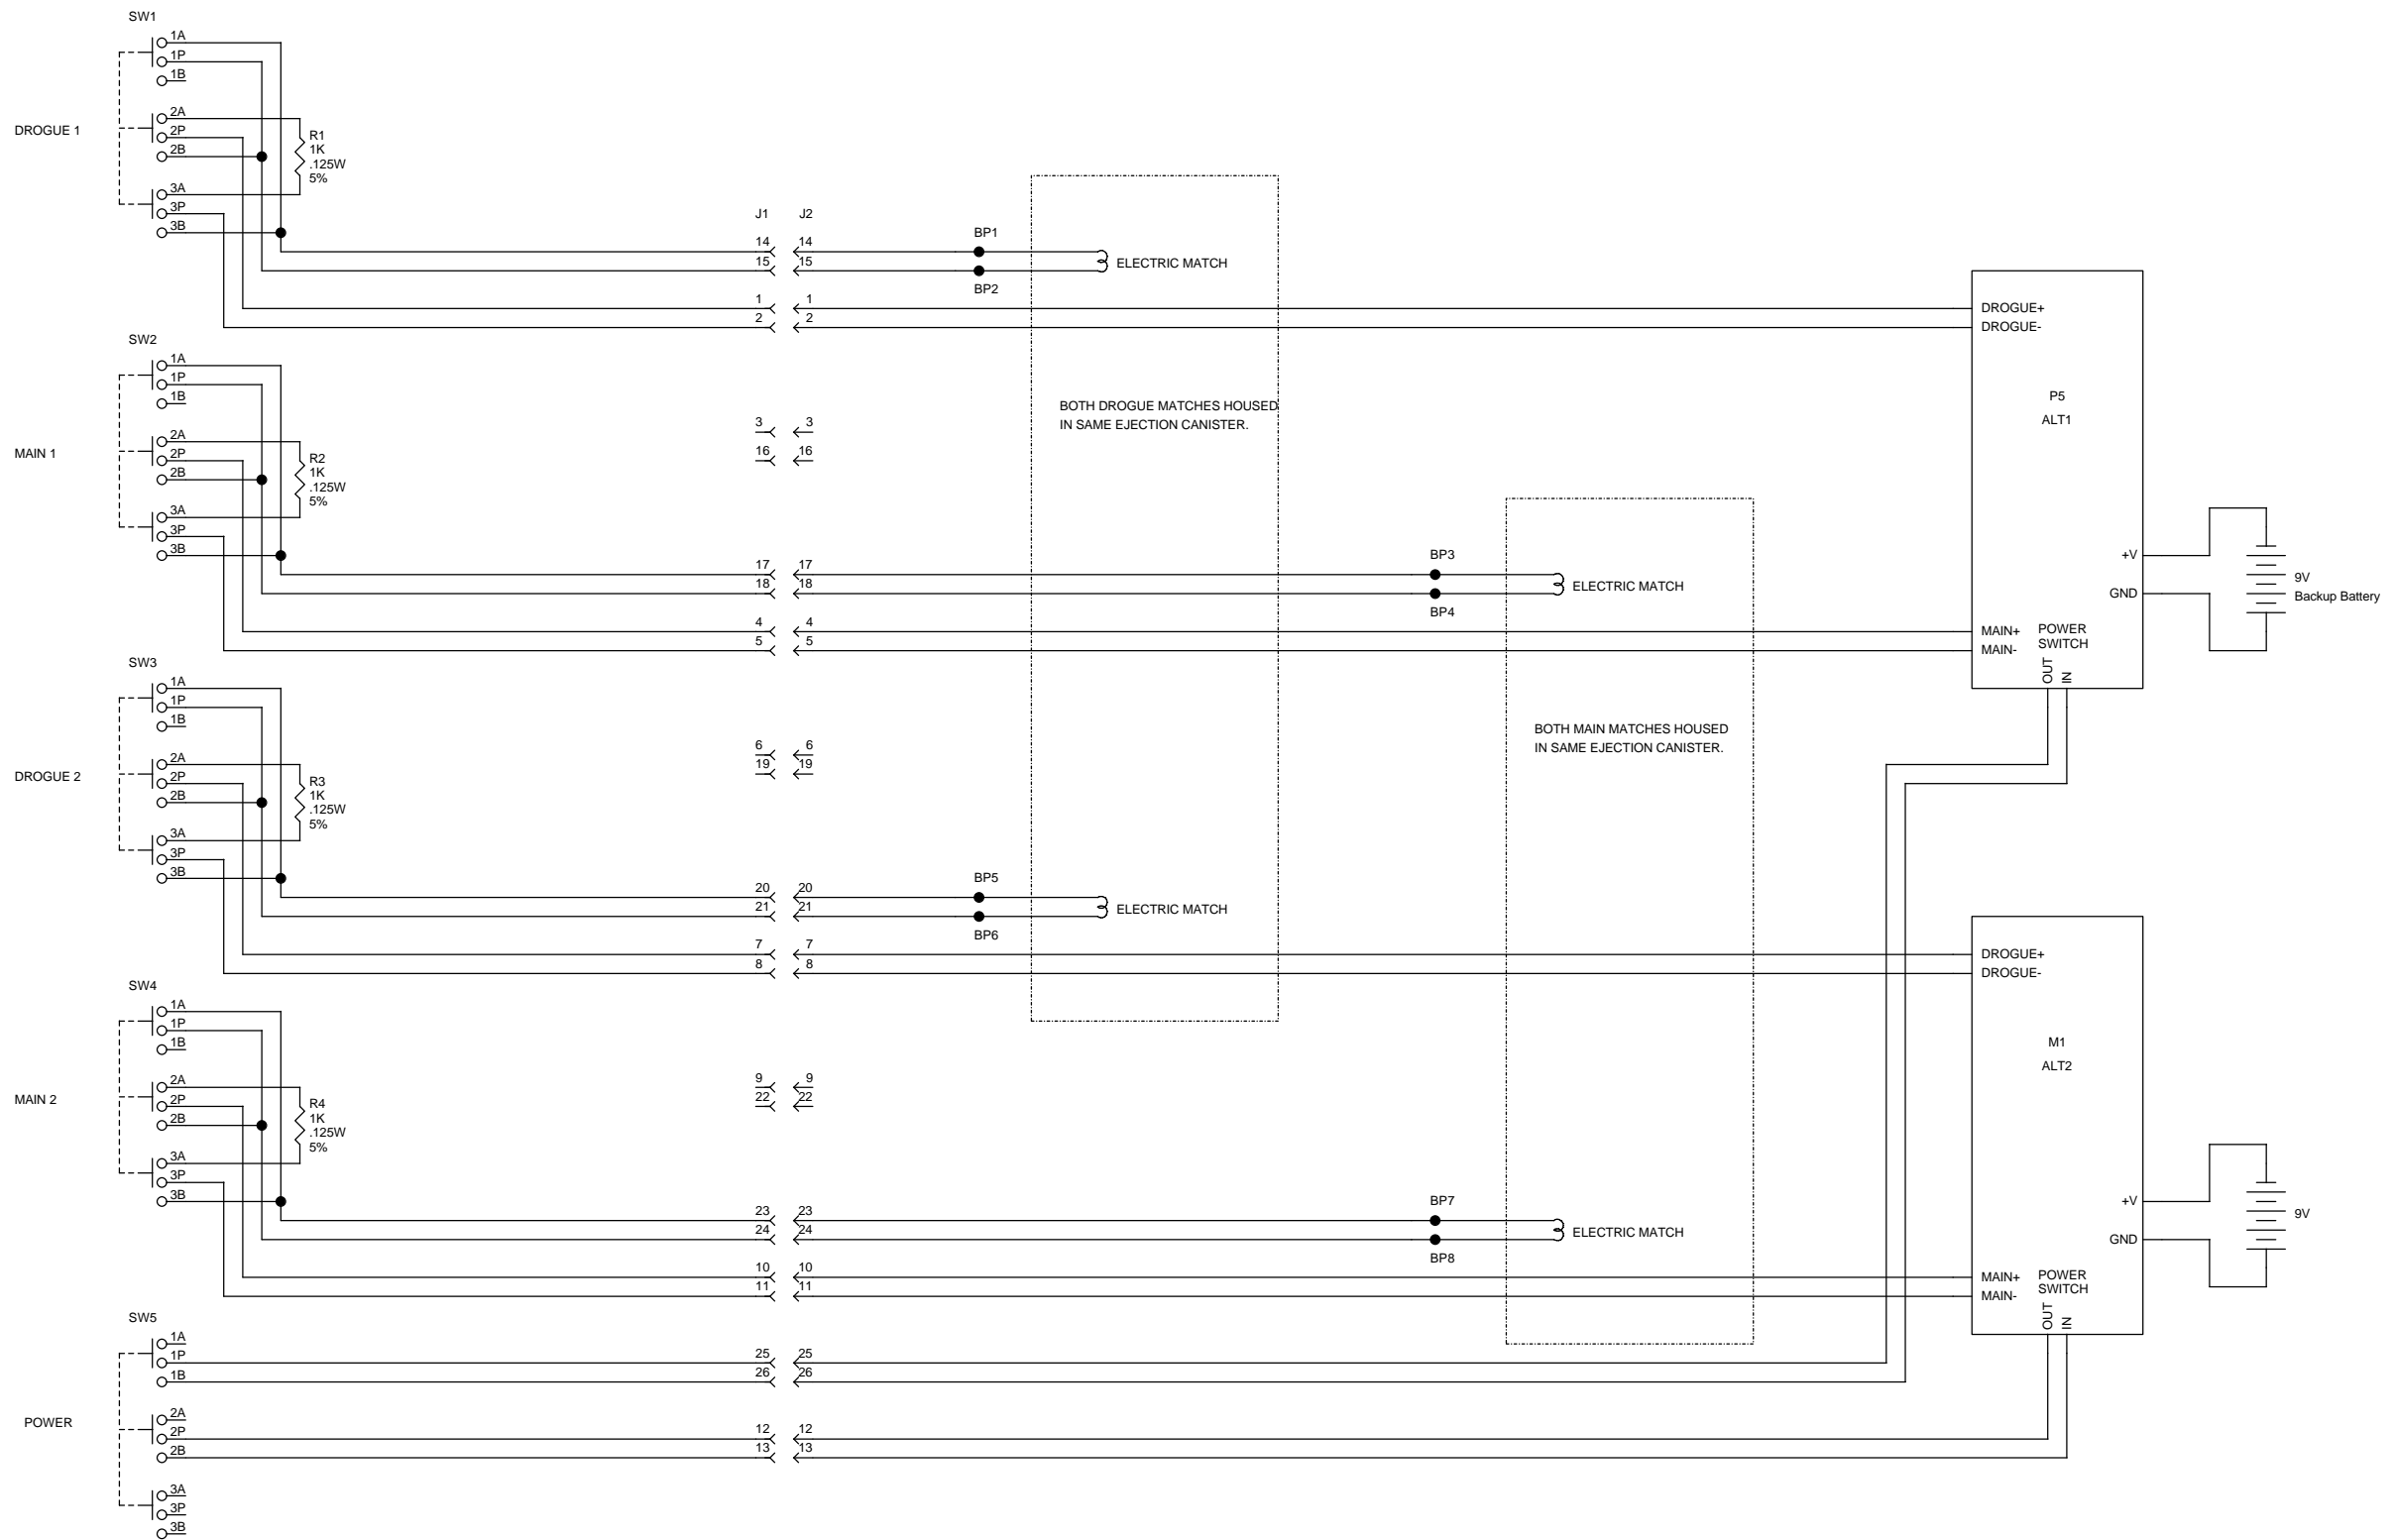

Robert B. Hart Jr.
3903 Castell Drive, Fort Wayne IN 46835

DIAGRAM, SCHEMATIC
ALTIMETER BAY WIRING

SIZE	DWG NO.	REV
D		A
SCALE	NONE	SHEET 1